

12 11 10 9 8 7 6 5 4 3 2 1

A

B

C


D

E

F

G

H

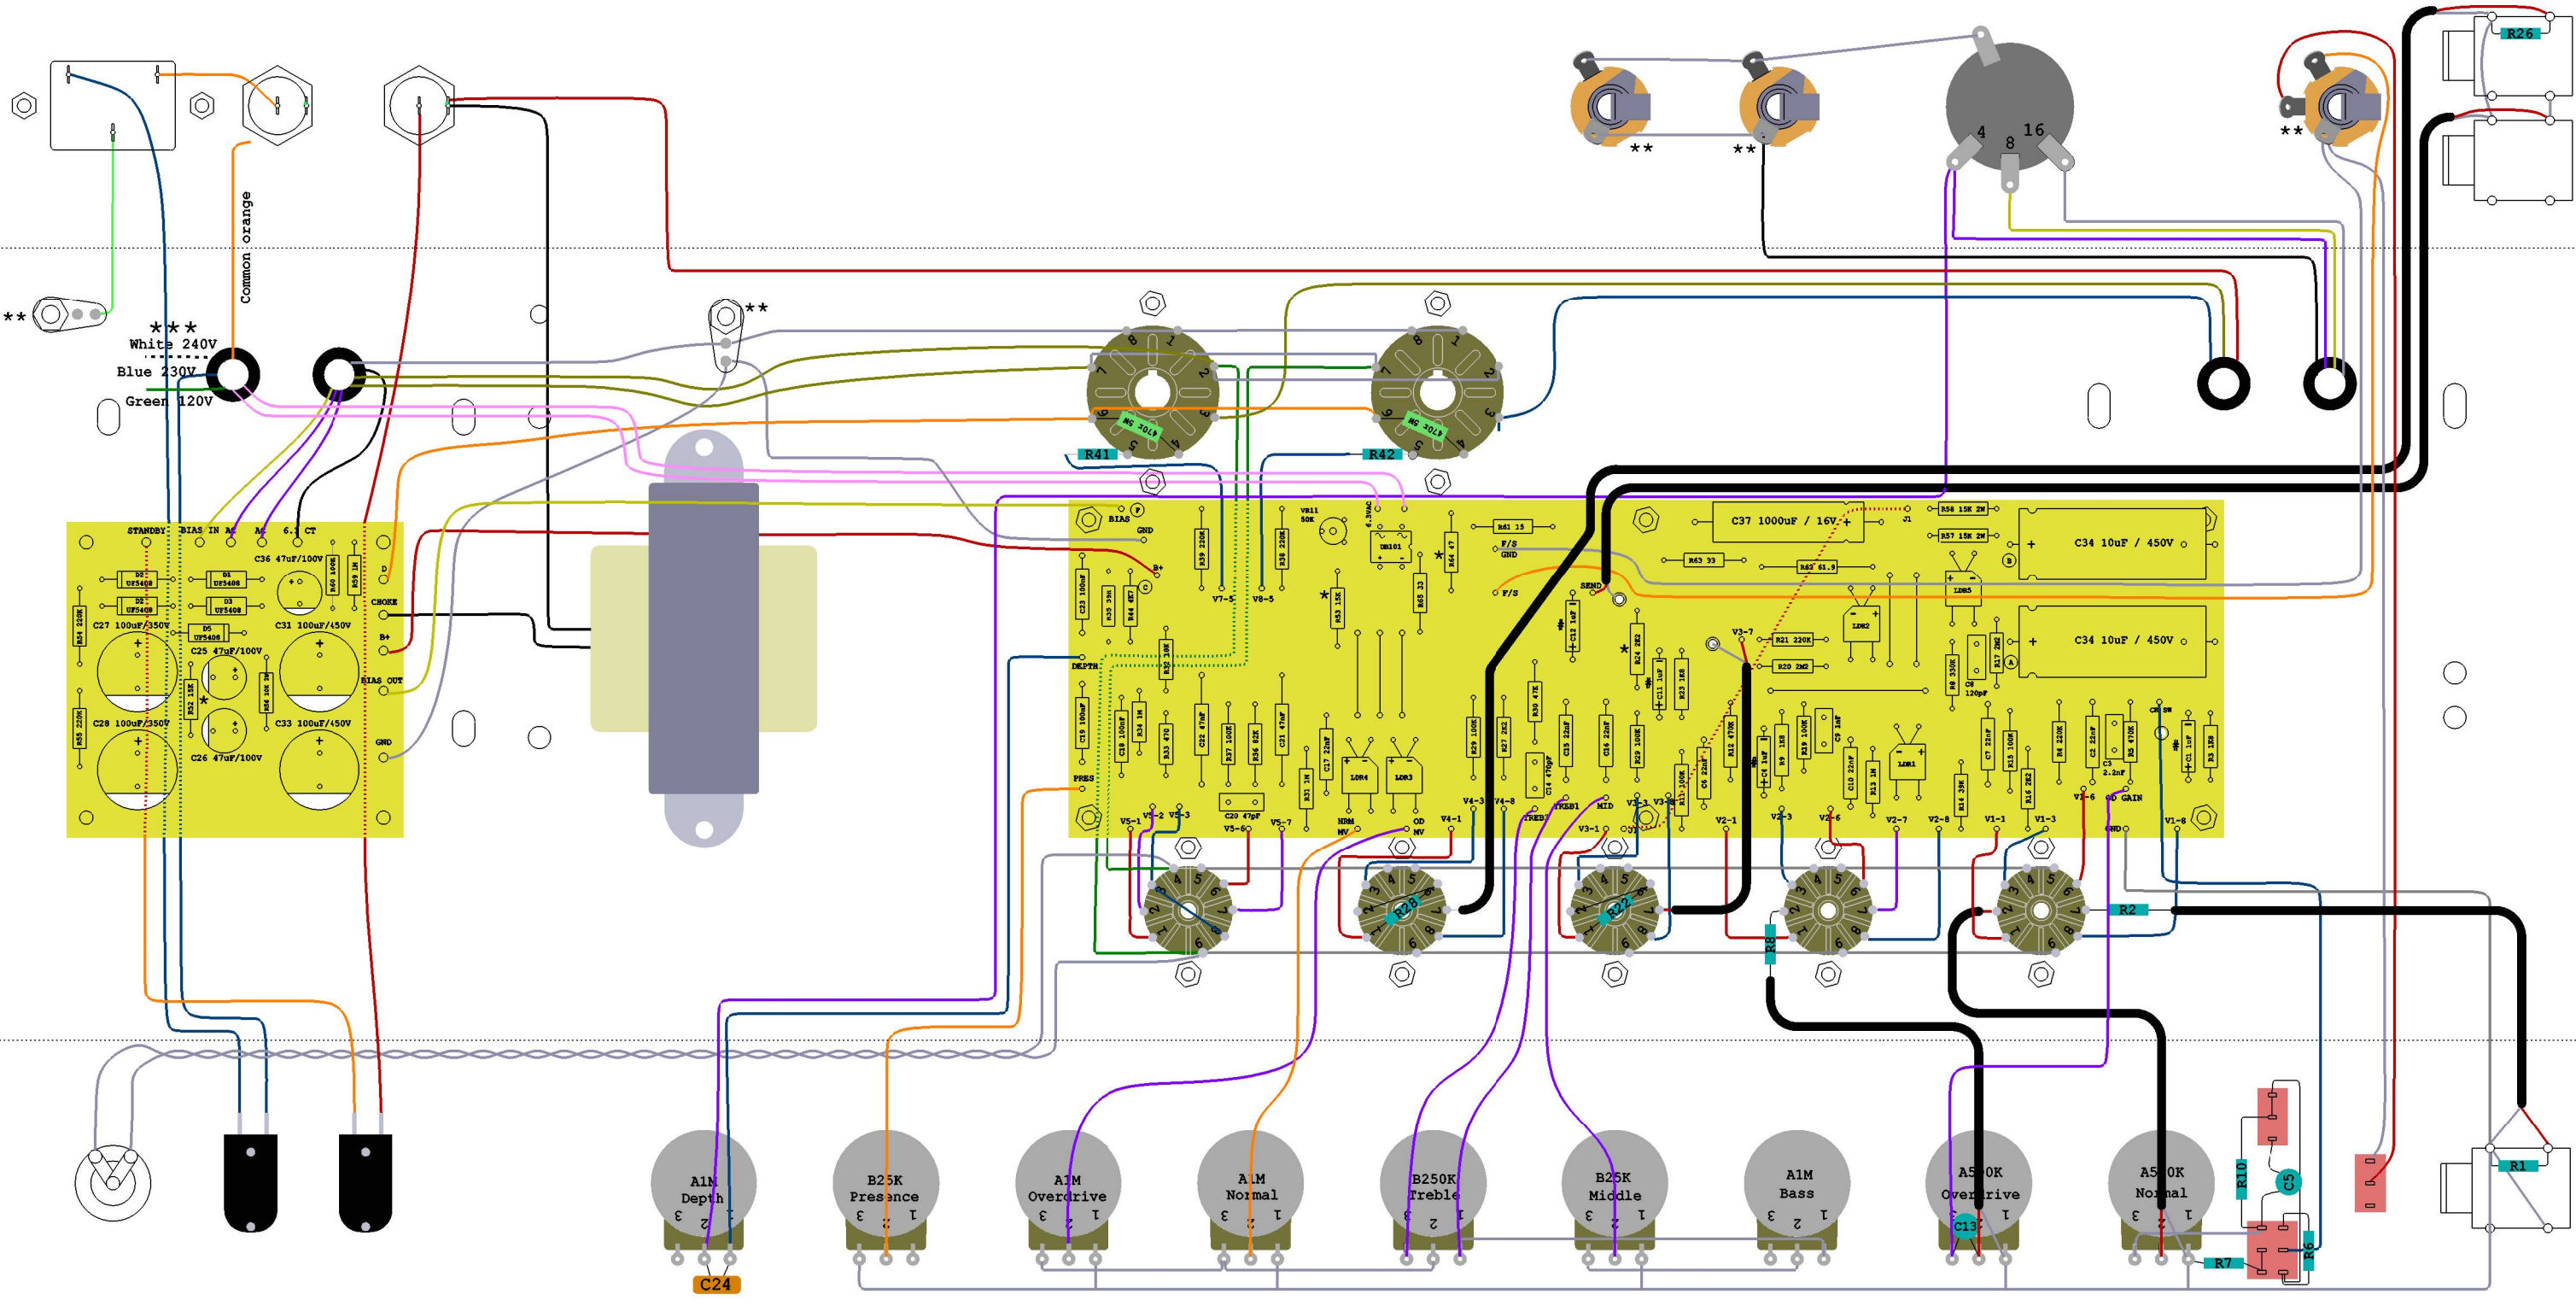

* R64 is reduced to 33 Ohm, R24 to 680 Ohm, R53 to 10K Ohm
R52 is increased to 22 K Ohm

If electrolytic capacitors are used for C1, C4, C11, C12
respect the polarity as indicated

** Ground to the chassis (remove the paint)

*** Choose the mains voltage of your country:
Green for 120V, Blue for 230V, White for 240V.
Insulate unused wires. Wiring for 230V is shown

Bias adjustment:
Set VR11 trimmer in order to obtain
about -35V on pin 5 of power tubes 6L6/5881

ROSAMP		
TITLE:	SLO30 Layout	
DATE: 10/23	REV: 2.3	SHEET: 1/1